


ENLOUVA IIIA 22'

REMOTE & RIDABLE

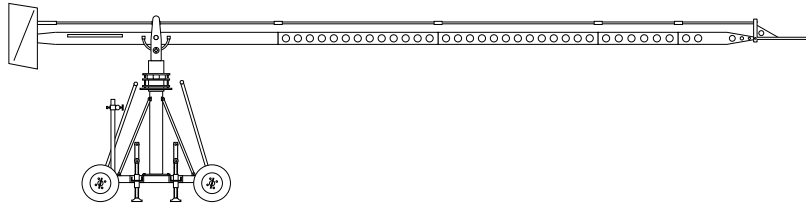

Technical Specifications

Height

Remote		Ridable	
Max.	23' 6"	Max.	12' 2"
Min.	11' 6"	Min.	12' 2"

Length

Remote		Ridable	
Max.	22' 6"	Max.	8' 2"
Min.	7' 6"	Min.	8' 2"

Weight

Max Remote		Max Ridable	
Arm and Base	1900 lbs.	Arm and Base	3500 lbs.
With Max. Payload of 125 lbs.		With Max. Payload of 506 lbs.	

VERSION GUIDE

Remote

Height	Length	Payload
11' 6"	7' 6"	187 lbs.
13' 6"	10' 6"	187 lbs.
16' 6"	13' 6"	187 lbs.
18' 9"	16' 6"	187 lbs.
21' 3"	19' 6"	154 lbs.
23' 6"	22' 6"	125 lbs.

Ridable

Height	Length	Payload
To Euro. Mount	To Euro. Mount	550 lbs
12' 2"	8' 2"	

!! Caution !!

Some weights listed are an approximation. Different cameras, heads, and accessories will alter payload weight, counterweight, and consequently total weight.

ENLOUVA IIIA 22'

REMOTE AND RIDABLE

Arm Pieces

Length	3' and 6'		
Width	5"		
Height	5"		
Weight	Main Arm 80 lbs.	6' 43 lbs.	3' 21 lbs.
Pieces	Main Arm 1	6' 2	3' 1

Arm Clearance

Width	7"
Height	11"

Nose

Length	2' 9" (33")
Width	7"
Height	10"
Weight	33 lbs.

Bucket

Width	1' 11" (23")
Height	2' 8" (32")
Depth	1' (12")
Weight	61 lbs.

Weights

35 Large @ 26 lbs
2 Small @ 13 lbs

Set-Up Time

Approx. 20min. w/two people

Technician Required

Yes No

Base

Length	5' 4" (64")
Width	Approx. 4' 10" (58")
Height	7' (84")
Weight	345 lbs.

Track

24 1/2" or 32" Round

Steering

Conventional
Crab*
Round*


*When equipped with 2 sided steering. Contact source.

Transportation Weight

Approximately 2200 lbs.

Transport Vehicle

12' Cube Van, or larger

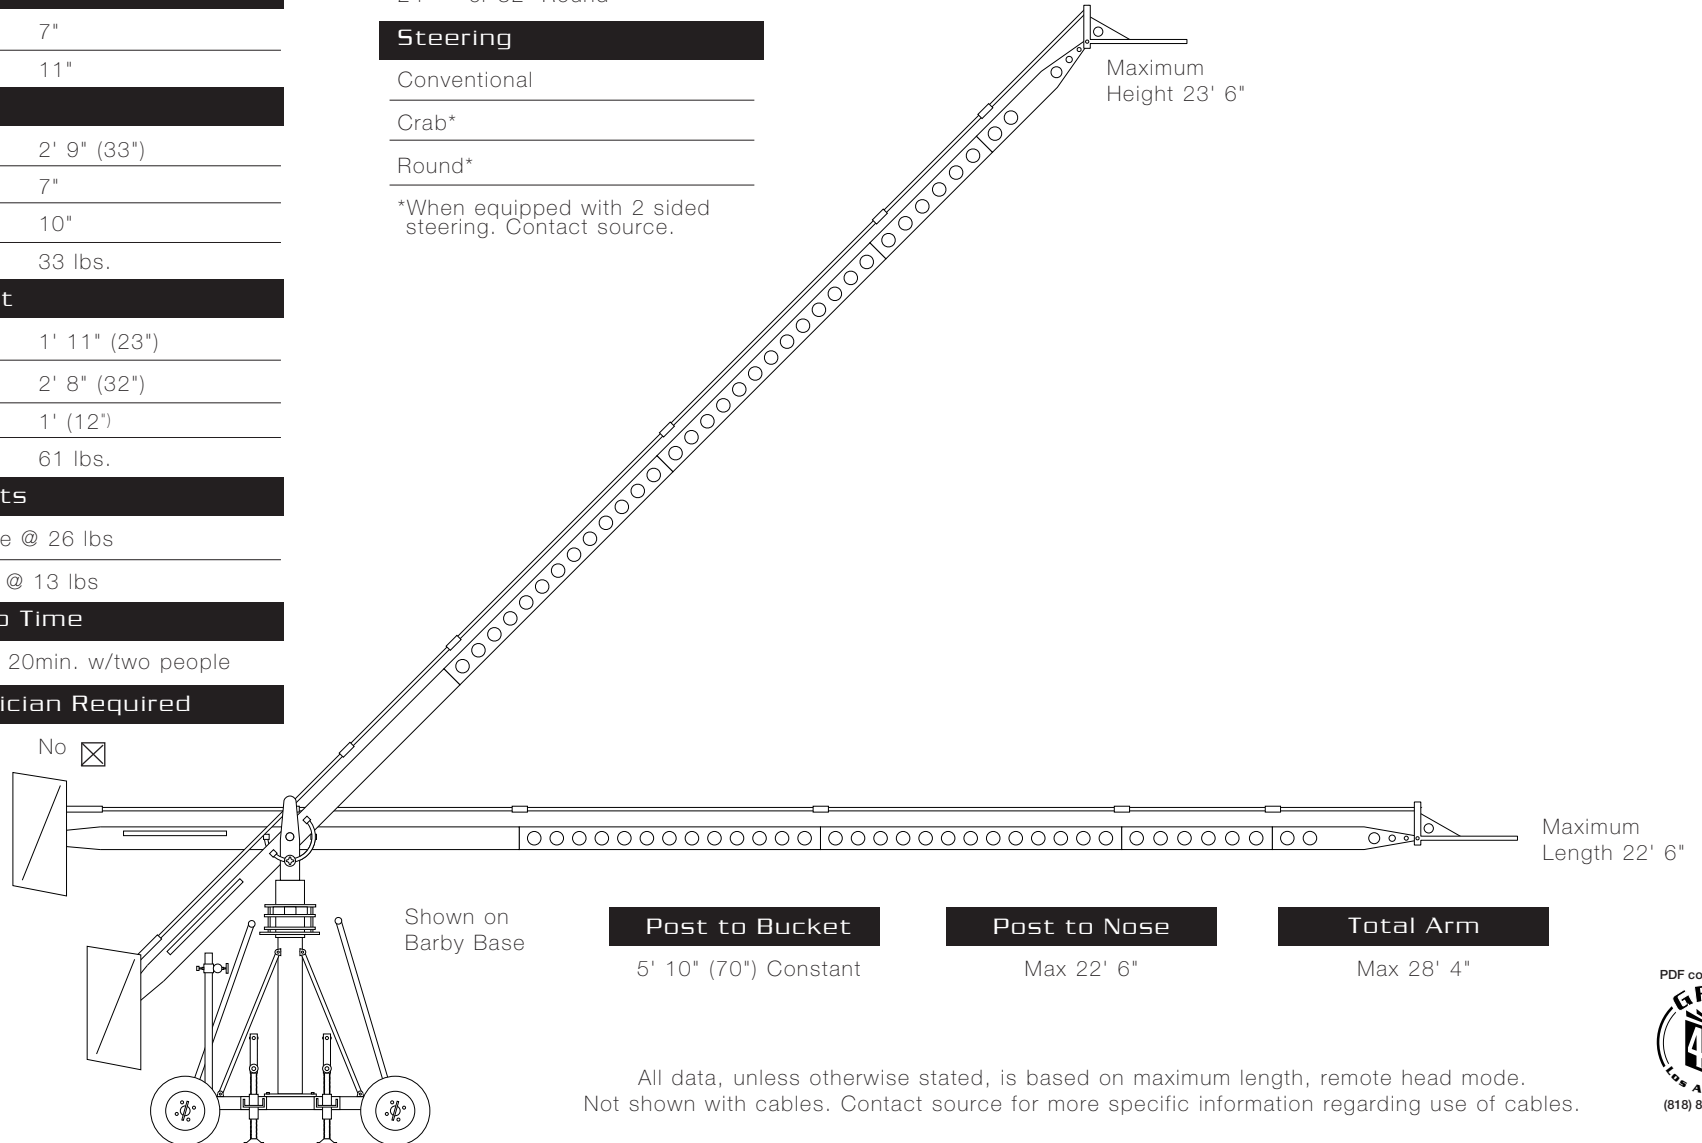

All data, unless otherwise stated, is based on maximum length, remote head mode. Not shown with cables. Contact source for more specific information regarding use of cables.